## INTERCEP



## Aerial Distribution Box TEN-FAB3



## **Features and Benefits**

This compact aerial distribution box can support up to 32 customer aerial connections. With it's unique fiber management, the FAB3 provides support for both LC and SC customer connections along with incoming fiber splicing and provision of different sizes of splitters. It is easy to install and operate and uses a considerably smaller amount of space on aerial pole which is huge advantage when mounting in congested locations.


- Compact size
- Up to 32 (LC) Customer Connections (16 SC)
- Splice Tray with 18 Splice Holders (9 Double Depth Positions)
- Integrated Fiber Management on Splice Tray
- Cable Management Under Splice Tray to Manage Loop through Cables
- 6 Splitter Positions in Base Under Splice Tray (4 x 1:2/4/8 + 2 x 1:16)
- 2 Rows of 8 Adapter Positions (Duplex LC or Simplex SC)
- 32 Customer Drop Entry Glands
- Secure Hinges and Catch Mechanisms
- Lid Securely Locked in Place with Security Key

Specifications subject to change without notice



## **TEN-FAB3** Optical Passives/Pole Mount Distribution Point Series

0	
General	
Style	Landscape Format – Rectangular in Profile Ability to Lock Lid Closed in Place Teleste Facet Style (Similar to FAB2/FAB9)
Dimensions (approx.)	Height – 219 mm Width – 150 mm Depth – 82 mm
Customer Connection	Number of Adapters per Row – 8 Number of Rows – 2
Splitters	Number of Splitter Positions $(1:2/4/8) - 4$ Number of Splitter Positions $(1:16) - 2$
Splicing	Positions for 18 Customer Splices Spare Fiber Coiling Space
Cable Entry Ports	32 Customer Drop Cable ports 2.8 mm 4 Main Entry Ports 10 mm
Material	Plastic Color Black UV Resistant RAL 9005
IP Rating	External Fittings to Fit to Mounting Bracket or on Building Wall
Bracket	
Style	Cruciform
Cable Management	Allow 5 Metres Cable to be Coiled Behind
Material	Steel, Black Powder Coated
Fixings	Cable Tie Slots to Hold Spare Coil in Place
Ordering Information	
P/N	Description
TEN-FAB3	Aerial Distribution Box - 32 Connections

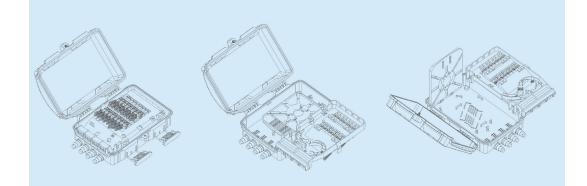

Specifications subject to change without notice

DS-0000-00-0000